


Faucet - Medium, wall mount, AC, polished

MODEL RANGE: TAPS_OTHERS | AT02-015AC

Faucets | Electronic faucets

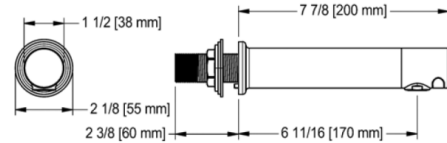

Aquarius hands-free commercial faucets are made for use in high demand, heavy traffic areas, where durability, reliability, and vandal resistance matter most. Aquarius faucets are easy to install, offer plug-in (AC) or battery (DC) power options, and contain highly intelligent electronic controls with programmable sensor ranges, run times, and automatic purging to eliminate stagnant water and help maintain outflow temperatures. Several helpful reporting features can also be accessed via an optional handheld controller. All faucets are manufactured from corrosion resistant Type 316 stainless steel in a choice of two finishes: satin or polished. 5 Lpm (litre per minute) / 1.32 gpm (gallons per minute) laminar flow. Low-flow models (LF) only: water flow rate is 1.32 Lpm / 0.35 gpm (gallons per minute). Certified to ASME A112.18.1/CSA B125.1

AT03-023AC, AC powered.

AT03-023DC, battery powered.

AT03-023AC-LF, Low-flow AC model.

AT03-023DC-LF, Low-flow DC model.

Technical data

Overall depth	7 7/8 "
Overall height	1 1/2 "
Overall width	1 1/2 "
Type of mounting	90° off-wall mounting
Type of operation	Sensor operation
Material casing	Stainless steel
Type of mixing	No mixing
Type of tap	In-wall tap
Calculation flow rate cold water	0.00500 liter per second
Minimum flow pressure	1.00000 bar
Spout projection	6 11/16 mm
Volume flow rate at 3 bar	0.08000 liter per second
Functional principle	Electronic self-closing
Default automatic hygiene flushing	24h after the last activity
Power supply connection	Battery 6 V / power supply 6 V
Type of sensor	Opto-electronic sensor
Surface finish casing	HIGH-POLISHED

NEW

PROJECT INFORMATION

Item Location	
Project Number	
Quote Number	
Notes	

ENGINEER'S APPROVAL